


## Z1型胀紧联接套

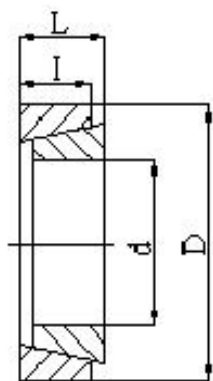

### Z1型胀紧联接套的基本尺寸及参数

| 基本尺寸 |     |     |      | 额定负荷         |              | 重量<br>kg |
|------|-----|-----|------|--------------|--------------|----------|
| d    | D   | L   | I    | 轴向力<br>$F_t$ | 扭 矩<br>$M_t$ |          |
| mm   |     |     |      | kN           | kN.m         |          |
| 10   | 13  | 4.5 | 3.7  | 1.4          | 0.007        | 0.01     |
| 12   | 15  | 4.5 | 3.7  | 1.6          | 0.0098       | 0.01     |
| 13   | 16  | 4.5 | 3.7  | 1.8          | 0.011        | 0.01     |
| 14   | 18  | 6.3 | 5.3  | 2.8          | 0.019        | 0.01     |
| 15   | 19  | 6.3 | 5.3  | 3.0          | 0.022        | 0.01     |
| 17   | 21  | 6.3 | 5.3  | 3.4          | 0.028        | 0.01     |
| 18   | 22  | 6.3 | 5.3  | 3.6          | 0.032        | 0.01     |
| 19   | 24  | 6.3 | 5.3  | 3.8          | 0.035        | 0.01     |
| 20   | 25  | 6.3 | 5.3  | 4.0          | 0.04         | 0.01     |
| 22   | 26  | 6.3 | 5.3  | 4.5          | 0.05         | 0.01     |
| 25   | 30  | 6.3 | 5.3  | 5.0          | 0.06         | 0.01     |
| 28   | 32  | 6.3 | 5.3  | 5.6          | 0.08         | 0.01     |
| 30   | 35  | 6.3 | 5.3  | 6.0          | 0.09         | 0.01     |
| 32   | 36  | 6.3 | 5.3  | 6.4          | 0.10         | 0.01     |
| 35   | 40  | 7.0 | 6.0  | 8.2          | 0.15         | 0.02     |
| 40   | 45  | 8   | 6.6  | 9.9          | 0.20         | 0.02     |
| 45   | 52  | 10  | 8.6  | 14.6         | 0.33         | 0.34     |
| 50   | 57  | 10  | 8.6  | 16.2         | 0.40         | 0.04     |
| 55   | 62  | 10  | 8.6  | 17.8         | 0.49         | 0.05     |
| 60   | 68  | 12  | 10.4 | 23.5         | 0.70         | 0.07     |
| 65   | 73  | 12  | 10.4 | 25.6         | 0.83         | 0.08     |
| 70   | 79  | 14  | 12.2 | 32.0         | 1.12         | 0.11     |
| 75   | 84  | 14  | 12.2 | 34.4         | 1.29         | 0.12     |
| 80   | 91  | 17  | 15   | 45           | 1.81         | 0.19     |
| 85   | 96  | 17  | 15   | 48           | 2.04         | 0.20     |
| 90   | 101 | 17  | 15   | 51           | 2.29         | 0.22     |
| 95   | 106 | 17  | 15   | 54           | 2.55         | 0.23     |
| 100  | 114 | 21  | 18.7 | 70           | 3.50         | 0.38     |

| 基本尺寸 |     |    |      | 额定负荷         |              | 重量<br>kg |
|------|-----|----|------|--------------|--------------|----------|
| d    | D   | L  | I    | 轴向力<br>$F_t$ | 扭 矩<br>$M_t$ |          |
| mm   |     |    |      | kN           | kN.m         |          |
| 105  | 119 | 21 | 18.7 | 73.2         | 3.82         | 0.40     |
| 110  | 124 | 21 | 18.7 | 77           | 4.25         | 0.41     |
| 120  | 134 | 21 | 18.7 | 84           | 5.05         | 0.45     |
| 125  | 139 | 21 | 18.7 | 92           | 5.75         | 0.62     |
| 130  | 148 | 28 | 25.3 | 124          | 8.05         | 0.85     |
| 140  | 158 | 28 | 25.3 | 134          | 9.35         | 0.91     |
| 150  | 168 | 28 | 25.3 | 143          | 10.7         | 0.97     |
| 160  | 178 | 28 | 25.3 | 152          | 12.2         | 1.02     |
| 170  | 191 | 33 | 30   | 192          | 16.3         | 1.50     |
| 180  | 201 | 33 | 30   | 204          | 18.3         | 1.58     |
| 190  | 211 | 33 | 30   | 214          | 20.4         | 1.68     |
| 200  | 224 | 38 | 34.8 | 262          | 26.2         | 2.32     |
| 210  | 234 | 38 | 34.8 | 275          | 28.9         | 2.45     |
| 220  | 244 | 38 | 34.8 | 288          | 37.7         | 2.49     |
| 240  | 267 | 42 | 39.5 | 358          | 43.0         | 3.52     |
| 250  | 280 | 48 | 44   | 415          | 52.0         | 4.68     |
| 260  | 290 | 48 | 44   | 435          | 56.5         | 4.82     |
| 280  | 313 | 53 | 49   | 520          | 72.5         | 6.27     |
| 300  | 333 | 53 | 49   | 555          | 83.0         | 6.47     |
| 320  | 360 | 65 | 59   | 710          | 114.0        | 10.9     |
| 340  | 380 | 65 | 59   | 755          | 128.5        | 11.5     |
| 360  | 400 | 65 | 59   | 800          | 144.0        | 12.2     |
| 380  | 420 | 65 | 59   | 845          | 160.5        | 12.8     |
| 400  | 440 | 65 | 59   | 890          | 178.0        | 13.5     |
| 420  | 460 | 65 | 59   | 935          | 196.0        | 14.1     |
| 450  | 490 | 65 | 59   | 998          | 224.5        | 15.2     |
| 480  | 520 | 65 | 59   | 1070         | 256          | 16.0     |
| 500  | 540 | 65 | 59   | 1110         | 278          | 16.5     |