




MP型电机底座

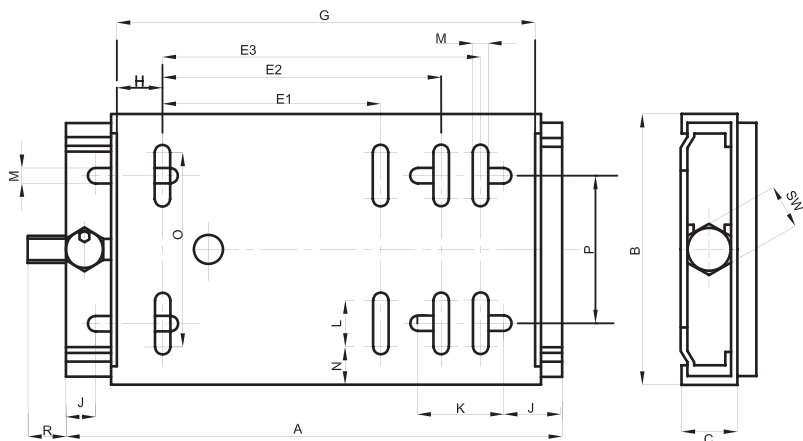


MP型电机底座的基本参数和尺寸

型号	电机型号	A	B	C	E1	E2	E3	G	H	J	K	L	M	N	O	P	R	SW	S	重量 Kg	Zul.Zugkra ft N
270-63/90-MP	63-71-80-90	270	195	33	100	125	140	190	25	25	50	50	10.5	31.5	132	98	25	19	3	3.1	680
307-90/112-MP	90-100-112	307	213	33	140	160	190	255	32.5	25	50	50	10.5	25.5	162	108	25	19	3	4.1	940
340-100/132-2-MP	100-112-132	340	290	40	160	190	216	286	35	30	62	48	12.5	37.5	215	165	30	22	4	7.9	1380
430-100/132-MP	100-112-132	430	290	40	160	190	216	286	35	30	62	48	12.5	37.5	215	165	30	22	4	8.9	1380
430-160/180-2-MP	160-180	430	370	40		254	279	380	50	30	62	62	12.5	41.5	287	248	30	22	4	12.0	2000
490-160/180-MP	160-180	490	370	40		254	279	380	50	30	62	62	12.5	41.5	287	248	30	22	4	12.7	2000
490-180/200-MP	180-200	490	410	40		279	318	418	50	30	60	52	17	40.5	329	285	30	22	4	14.6	2630
585-200/225-MP	200-225	585	450	50		318	356	468	56	30	60	52	17	49	352	300	30	22	5	23.7	3800
600-250-MP	250	600	470	65			406	515	55	30	60	60	22	50.5	369	320	35	27	5	28.1	4000
735-280-MP	280	735	570	65			457	585	64	30	70	70	22	55	460	420	35	27	5	38.2	4400

特点：采用优质钢板冲压折弯而成，表面镀锌处理。



SMA型电机底座

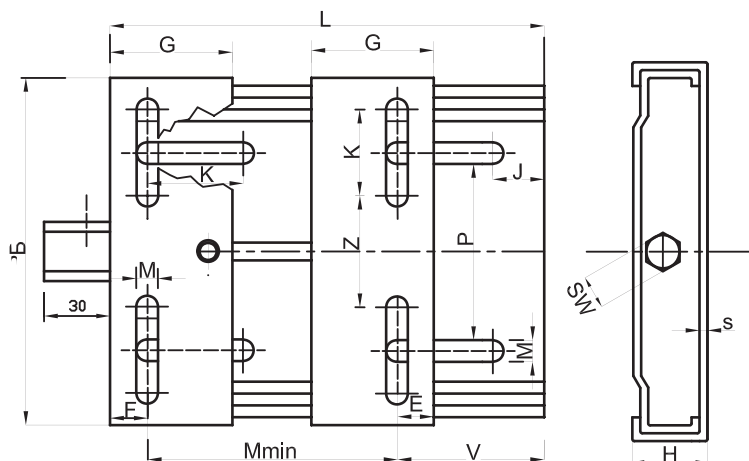

SMA型电机底座的基本参数和尺寸

Type	Frame Size	L	B	H	Mmin	G	E	F	J	K	M	N	P	SW	S	KG
210	63-80	210	195	33	100	70	20	20	25	50.0	10.5	43	98	19	3	2.6
270	63-100	270	195	33	100	70	20	20	25	50.0	10.5	43	90	19	3	3
340	90-132	340	290	39	136	95	27	27	30	62.0	12.5	90	165	22	4	6.3
430	90-160	430	290	39	136	95	27	27	30	62.0	12.5	90	165	22	4	7.5
490	160-200	490	410	40	110	95	40	40	30	60.0	15.0	193	284	22	4	10.8

特点：安装滑板采用分体式，便于电机的螺栓安装。适用中小系列电动机安装调节。