




MB型电机底座

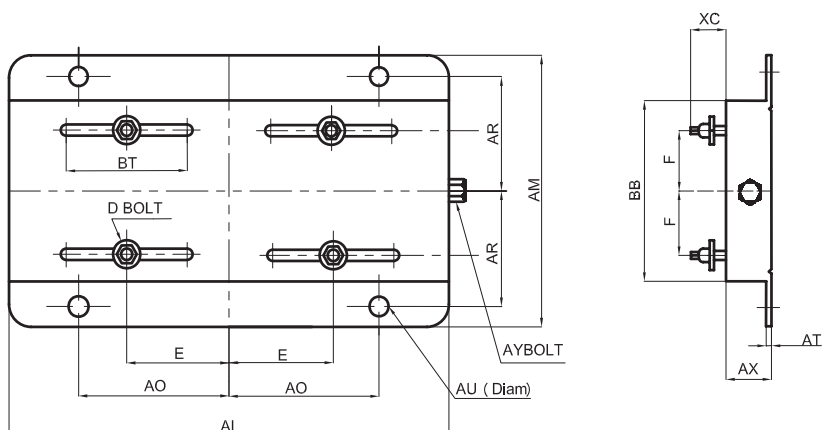


MB型电机底座的基本参数和尺寸

型号	AL	AM	AX	BB	E	F	AO	AR	AU	BT	AT	XC	D BOLT	AT BOLT	APPROX WT.(LBS)
56	10-5/8	6-1/2	1-1/8	4-1/2	2-7/16	1-1/2	3-13/16	2-7/8	3/8	3	0.08	7/8	5/16×1	3/8×4	3
66	12	8-1/2	1-1/8	6-1/2	3-1/8	2-1/2	4-1/2	3-7/8	3/8	3	0.08	7/8	5/16×1	3/8×4	4
143	10-1/2	7-1/2	1-1/8	5-1/2	2-3/4	2	3-3/4	3-3/8	3/8	3	0.12	13/16	5/16×1	3/8×4	5
145	10-1/2	8-1/2	1-1/8	6-1/2	2-3/4	2-1/2	3-3/4	3-7/8	3/8	3	0.12	13/16	5/16×1	3/8×4	6
182	12-3/4	9-1/2	1-1/2	6-1/2	3-3/4	2-1/4	4-1/2	4-1/4	1/2	3	0.13	1-1/2	3/8×1-3/4	1/2×6	9
184	12-3/4	10-1/2	1-1/2	7-1/2	3-3/4	2-3/4	4-1/2	4-3/4	1/2	3	0.13	1-1/2	3/8×1-3/4	1/2×6	9-1/2
213	15	11	1-3/4	7-1/2	4-1/4	2-3/4	5-1/4	4-3/4	1/2	3-1/2	0.16	1-1/2	3/8×1-3/4	1/2×6	13-1/2
215	15	12-1/2	1-3/4	9	4-1/4	3-1/2	5-1/4	5-1/2	1/2	3-1/2	0.16	1-1/2	3/8×1-3/4	1/2×6	15-1/2



MB型电机底座

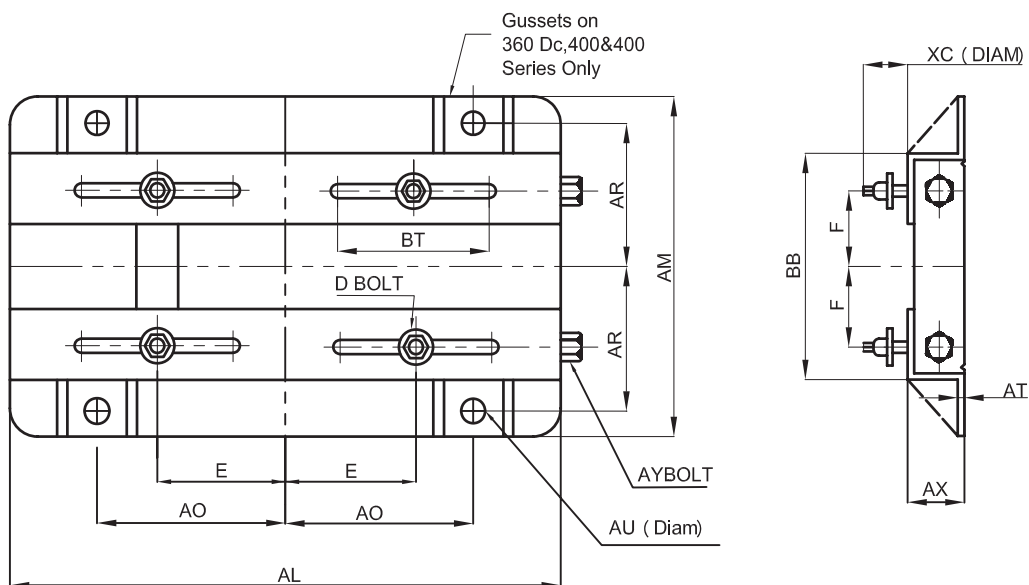

MB型电机底座的基本参数和尺寸

型号	AL	AM	AX	BB	E	F	AO	AR	AU	BT	AT	XC	D BOLT	AY BOLT	APPROX WT.(LBS)
254B2	17-3/4	15-1/8	2	10-3/4	5	4-1/8	6-1/4	6-5/8	5/8	4	3/16	1-3/8	1/2×1-3/4	5/8×9	17
256B2	17-3/4	16-7/8	2	12-1/2	5	5	6-1/4	7-1/2	5/8	4	3/16	1-3/8	1/2×1-3/4	5/8×9	18
284B2	19-3/4	16-7/8	2	12-1/2	5-1/2	4-3/4	7	7-1/2	5/8	4-1/2	3/16	1-5/8	1/2×2	5/8×9	21
286B2	19-3/4	18-3/8	2	14	5-1/2	5-1/2	7	8-1/4	5/8	4-1/2	3/16	1-5/8	1/2×2	5/8×9	22
324B2	22-3/4	19-1/4	2-1/2	14	6-1/4	5-1/4	8	8-1/2	3/4	5-1/4	3/16	2-1/8	5/8×2-1/2	3/4×9	30
326B2	22-3/4	20-3/4	2-1/2	15-1/2	6-1/4	6	8	9-1/4	3/4	5-1/4	3/16	2-1/8	5/8×2-1/2	3/4×9	31
364B2	25-1/2	20-1/2	2-1/2	15-1/2	7	5-5/8	9	9-1/8	3/4	6	1/4	2	5/8×2-1/2	3/4×11	45
365B2	25-1/2	21-1/2	2-1/2	16-1/2	7	6-1/8	9	9-5/8	3/4	6	1/4	2	5/8×2-1/2	3/4×11	46
404B2	28-3/4	22-3/8	3	16-1/2	8	6-1/8	10	9-7/8	7/8	7	1/4	2-9/16	3/4×3	3/4×14	55
405B2	28-3/4	23-7/8	3	18	8	6-7/8	10	10-5/8	7/8	7	1/4	2-9/16	3/4×3	3/4×14	56
444B2	31-1/4	24-5/8	3	19-1/4	9	7-1/4	11	11	7/8	7-1/2	5/16	2-1/2	3/4×3	3/4×14	74
445B2	31-1/4	26-5/8	3	21-1/4	9	8-1/4	11	12	7/8	7-1/2	5/16	2-1/2	3/4×3	3/4×14	75
447B2	31-1/4	30-1/8	3	24-3/4	9	10	11	13-3/4	7/8	7-1/2	5/16	2-1/2	3/4×3	3/4×14	89
449B2	31-1/4	35-1/8	3	29-3/4	9	12-1/2	11	16-1/4	7/8	7-1/2	5/16	2-1/2	3/4×3	3/4×14	95

特点: 采用优质钢材折弯、焊接而成，表面喷塑处理，配有电机安装螺丝，安装调节电机更方便。适用大、中、小型电机的装配调节。



MB型电机底座

MB型电机底座的基本参数和尺寸

型号	AL	AM	AX	BB	E	F	AO	AR	AU	BT	AT	XC	D BOLT	AY BOLT	APPROX. WT.(LBS)
444DC	31-1/4	24-5/8	3	19-1/4	9	7-1/4	11	11	1-1/8	7-1/2	5/16	3	1×3-1/2	3/4×14	83
445DC	31-1/4	26-5/8	3	20-1/4	9	8-1/4	11	12	1-1/8	7-1/2	5/16	3	1×3-1/2	3/4×14	85
446DC	31-1/4	28-1/8	3	22-3/4	9	9	11	12-3/4	1-1/8	7-1/2	5/16	3	1×3-1/2	3/4×14	87
447DC	31-1/4	30-1/8	3	24-3/4	9	10	11	13-3/4	1-1/8	7-1/2	5/16	3	1×3-1/2	3/4×14	89
503	35	26	3-1/2	18-3/4	10	7	12-1/2	11-1/2	1	8	5/16	3	7/8×3-1/2	7/8×16	130
504	35	28	3-1/2	20-3/4	10	8	12-1/2	12-1/2	1	8	5/16	3	7/8×3-1/2	7/8×16	132
504DC	35	28	3-1/2	20-3/4	10	8	12-1/2	12-1/2	1-1/4	8	5/16	3	1-1/8×3-1/2	7/8×16	132
505	35	30	3-1/2	22-3/4	10	9	12-1/2	13-1/2	1	8	5/16	3	7/8×3-1/2	7/8×16	135
505DC	35	30	3-1/2	22-3/4	10	9	12-1/2	13-1/2	1-1/4	8	5/16	3	1-1/8×3-1/2	7/8×16	135
506	35	32	3-1/2	24-3/4	10	10	12-1/2	14-1/2	1	8	5/16	3	7/8×3-1/2	7/8×16	138
506DC	35	32	3-1/2	24-3/4	10	10	12-1/2	14-1/2	1-1/4	8	5/16	3	1-1/8×3-1/2	7/8×16	138
507	35	34	3-1/2	26-3/4	10	11	12-1/2	15-1/2	1	8	5/16	3	7/8×3-1/2	7/8×16	141
507DC	35	34	3-1/2	26-3/4	10	11	12-1/2	15-1/2	1-1/4	8	5/16	3	1-1/8×3-1/2	7/8×16	141
508	35	37	3-1/2	20-3/4	10	12-1/2	12-1/2	17	1	8	5/16	3	7/8×3-1/2	7/8×16	145
583	38-3/4	29	4	20-3/4	11-1/2	8	14-1/2	13	1	8-1/2	3/8	2-15/16	7/8×3-1/2	7/8×16	178
583DC	38-3/4	29	4	20-3/4	11-1/2	8	14-1/2	13	1-1/4	8-1/2	3/8	2-15/16	1-1/8×3-1/2	7/8×16	178
584	38-3/4	31	4	22-3/4	11-1/2	9	14-1/2	14	1	8-1/2	3/8	2-15/16	7/8×3-1/2	7/8×16	182
584DC	38-3/4	31	4	22-3/4	11-1/2	9	14-1/2	14	1-1/4	8-1/2	3/8	2-15/16	1-1/8×3-1/2	7/8×16	182
585	38-3/4	33	4	24-3/4	11-1/2	10	14-1/2	15	1	8-1/2	3/8	2-15/16	7/8×3-1/2	7/8×16	185
585DC	38-3/4	33	4	24-3/4	11-1/2	10	14-1/2	15	1-1/4	8-1/2	3/8	2-15/16	1-1/8×3-1/2	7/8×16	185
682	42-1/2	28-3/4	4-1/4	23	13-1/2	9	13-1/2	13	1-1/8	9	3/8	3-7/16	1×4	7/8×16	148
682DC	42-1/2	28-3/4	4-1/4	23	13-1/2	9	13-1/2	13	1-3/8	9	3/8	3-7/16	1-1/8×4	7/8×16	148
683	42-1/2	30-3/4	4-1/4	25	13-1/2	10	13-1/2	14	1-1/8	9	3/8	3-7/16	1×4	7/8×16	188
683DC	42-1/2	30-3/4	4-1/4	25	13-1/2	10	13-1/2	14	1-3/8	9	3/8	3-7/16	1-1/8×4	7/8×16	188
684	42-1/2	32-3/4	4-1/4	27	13-1/2	11	13-1/2	15	1-1/8	9	3/8	3-7/16	1×4	7/8×16	192
684DC	42-1/2	32-3/4	4-1/4	27	13-1/2	11	13-1/2	15	1-3/8	9	3/8	3-7/16	1-1/8×4	7/8×16	192
685	42-1/2	35-3/4	4-1/4	30	13-1/2	12-1/2	13-1/2	16-1/2	1-1/8	9	3/8	3-7/16	1×4	7/8×16	195
685DC	42-1/2	35-3/4	4-1/4	30	13-1/2	12-1/2	13-1/2	16-1/2	1-3/8	9	3/8	3-7/16	1-1/8×4	7/8×16	195